

**Community Development Department**  
**1600 First St., P.O. Box 660**  
**Napa, CA 94559-0660**

Engineering Division  
 Phone: (707) 257-9530

Planning Division  
 Phone: (707) 257-9530


Building Division  
 Phone: (707) 257-9540  
 Inspections: (707) 257-1063

Facsimile: (707) 257-9522


Napa Fire Department  
 Fire Prevention Division  
 Phone: (707) 257-9590




**ACCESSIBILITY FOR HALLS, STAIRS, DOORS, REACH HEIGHTS, COUNTERS, SEATING.**

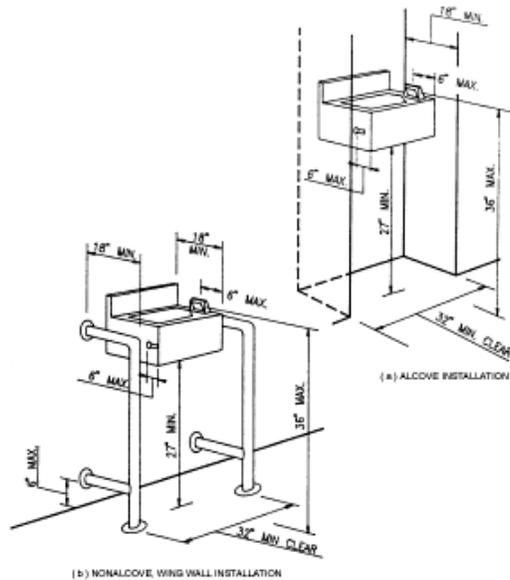

THESE DIAGRAMS ILLUSTRATE THE SPECIFIC REQUIREMENTS OF THESE REGULATIONS AND ARE INTENDED ONLY AS AN AID FOR BUILDING DESIGN AND CONSTRUCTION.



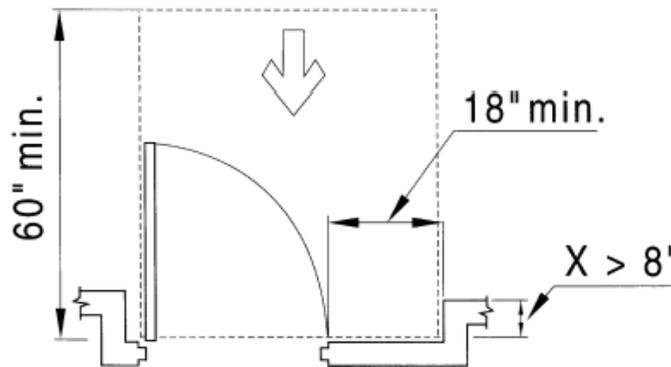


(a) PULL SIDE (INTERIOR DOOR)




(b) SLIDING DOOR

All forms and handouts are available on [www.cityofnapa.org](http://www.cityofnapa.org)

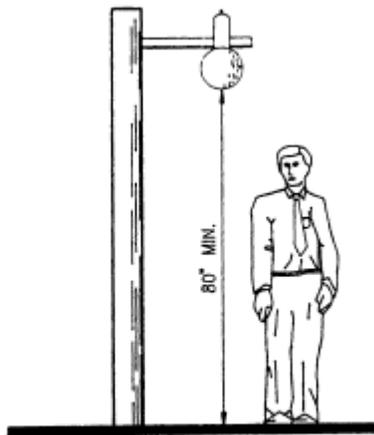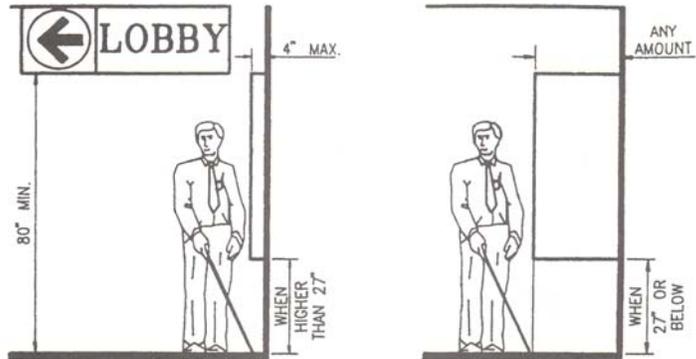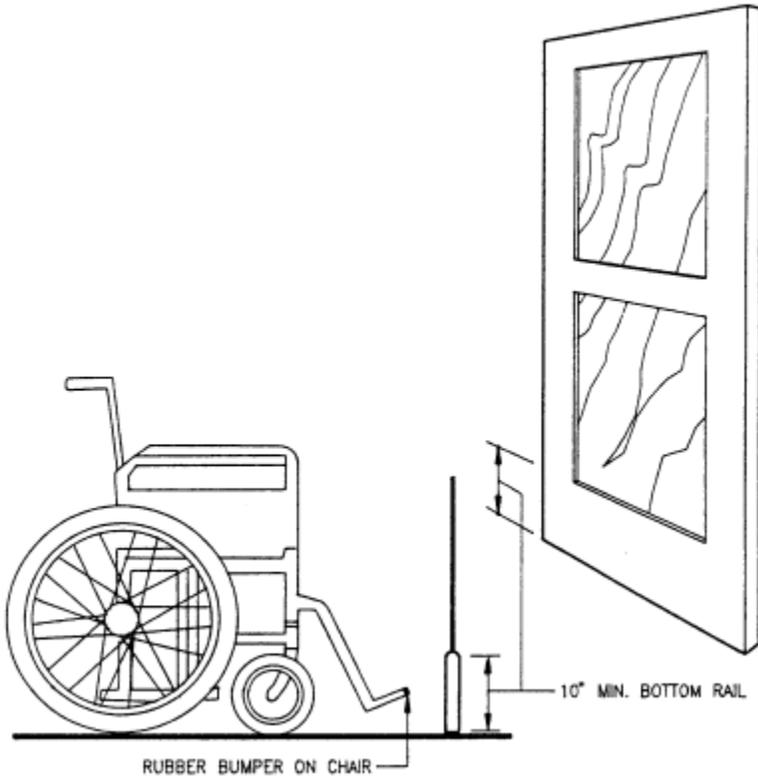


All forms and handouts are available on [www.cityofnapa.org](http://www.cityofnapa.org)

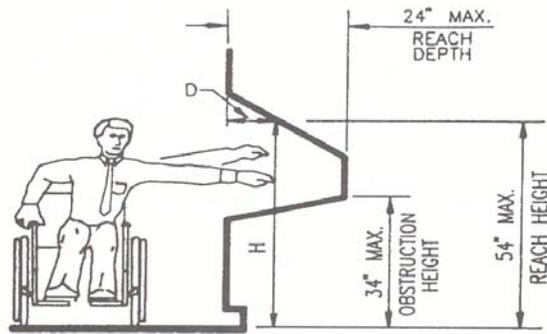


(d) ATM REACH RANGE LIMITS





CORRESPONDING REACH HEIGHTS  
FOR GIVEN DEPTHS :


WHEN D = 10"	OR LESS,	H = 54" MAX.
WHEN D = 11"		H = 53.5" MAX.
WHEN D = 12"		H = 53.0" MAX.
WHEN D = 13"		H = 52.5" MAX.
WHEN D = 14"		H = 51.5" MAX.
WHEN D = 15"		H = 51.0" MAX.
WHEN D = 16"		H = 50.5" MAX.
WHEN D = 17"		H = 50.0" MAX.
WHEN D = 18"		H = 49.5" MAX.
WHEN D = 19"		H = 49.0" MAX.
WHEN D = 20"		H = 48.5" MAX.
WHEN D = 21"		H = 47.5" MAX.
WHEN D = 22"		H = 47.0" MAX.
WHEN D = 23"		H = 46.5" MAX.
WHEN D = 24"		H = 46.0" MAX.

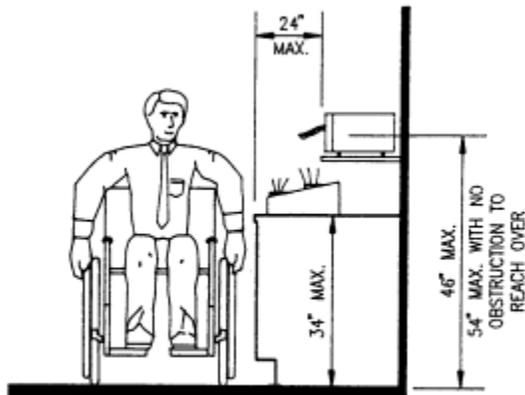


THESE DIAGRAMS ILLUSTRATE THE SPECIFIC REQUIREMENTS OF THESE REGULATIONS AND ARE INTENDED ONLY AS AN AID FOR BUILDING DESIGN AND CONSTRUCTION.

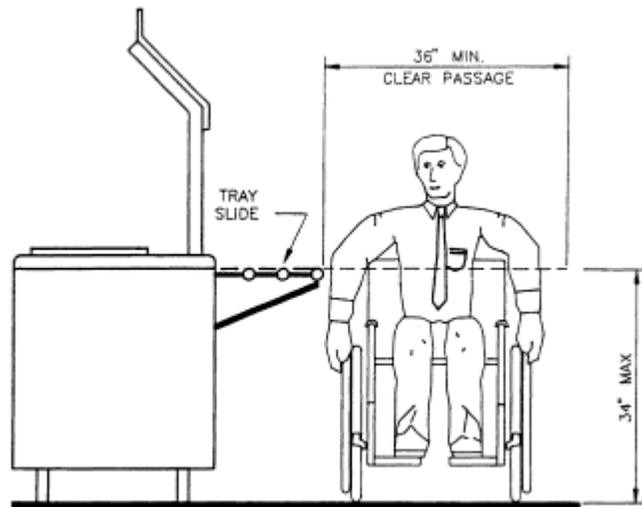

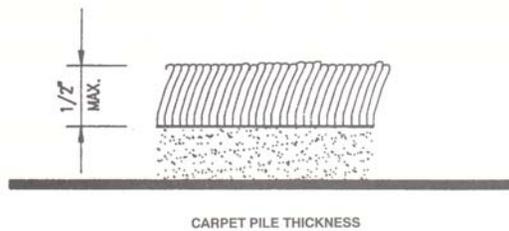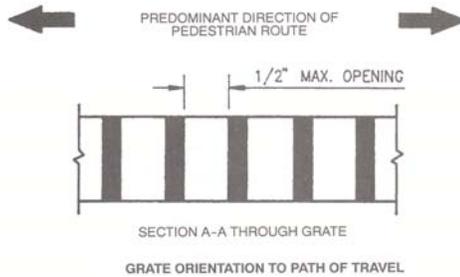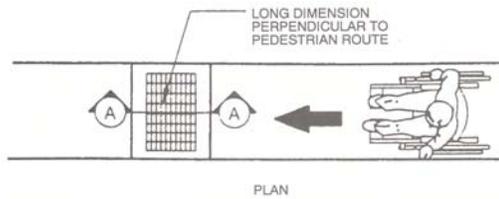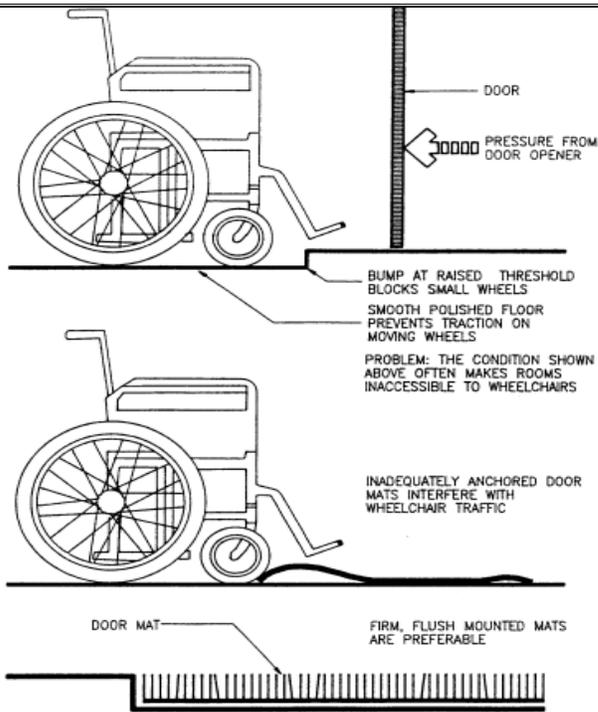


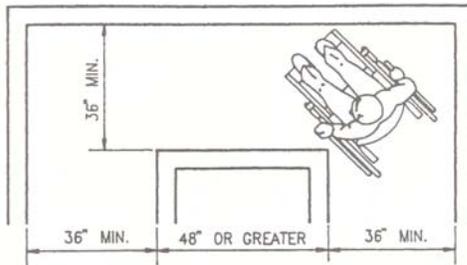


90° TURN

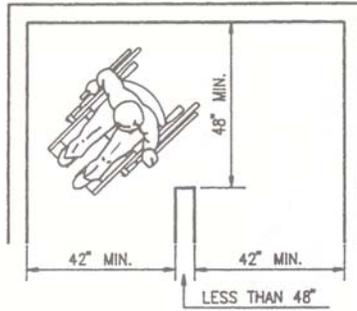


URNS AROUND AN OBSTRUCTION



CHANGE IN LEVEL




CHANGE IN LEVEL




(a) SINGLE DOOR

CLEAR OPENINGS MUST BE BETWEEN THE DOOR IN ITS 90° OPENING POSITION AND THE FACE OF THE STOP.



(b) DOUBLE DOOR


CLEAR OPENINGS FOR TWO LEAF DOORS MUST BE BETWEEN EITHER DOOR IN ITS 90° OPEN POSITION AND THE EDGE OF THE OTHER DOOR.




(c) PASSAGE CLEARANCE

AN ADULT SIZE WHEELCHAIR AVERAGES 37 INCHES IN WIDTH. THE REQUIRED 32 INCH CLEAR OPENING ALLOWS 2-1/2 INCHES ON EACH SIDE FOR HANDS.


THESE DIAGRAMS ILLUSTRATE THE SPECIFIC REQUIREMENTS OF THESE REGULATIONS AND ARE INTENDED ONLY AS AN AID FOR BUILDING DESIGN AND CONSTRUCTION.

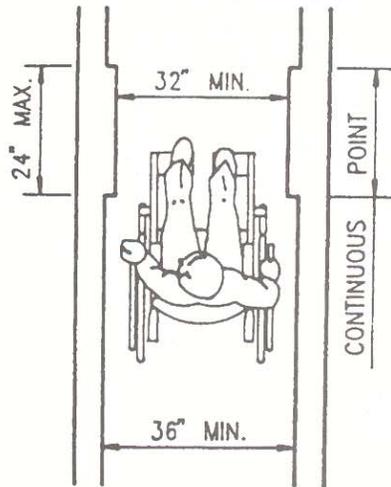


-MINIMUM CLEAR WIDTH FOR SINGLE WHEELCHAIR

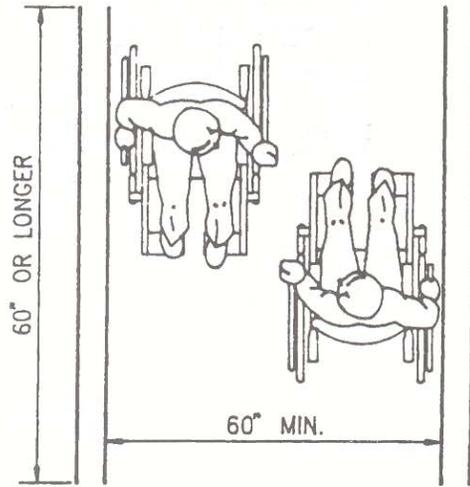


-MINIMUM CLEAR WIDTH FOR TWO WHEELCHAIRS

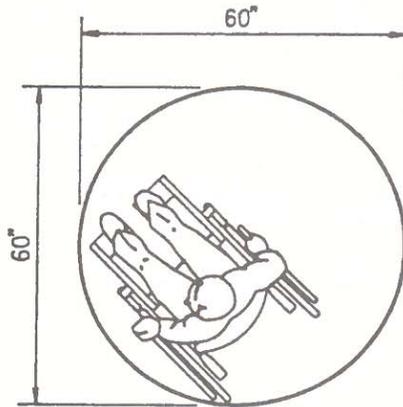


60 INCHES DIAMETER SPACE

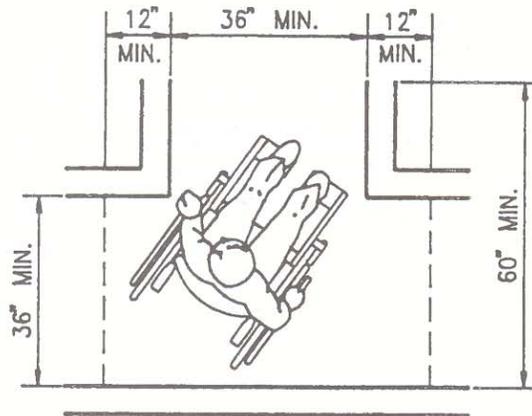


T-SHAPED SPACE FOR 180° TURNS

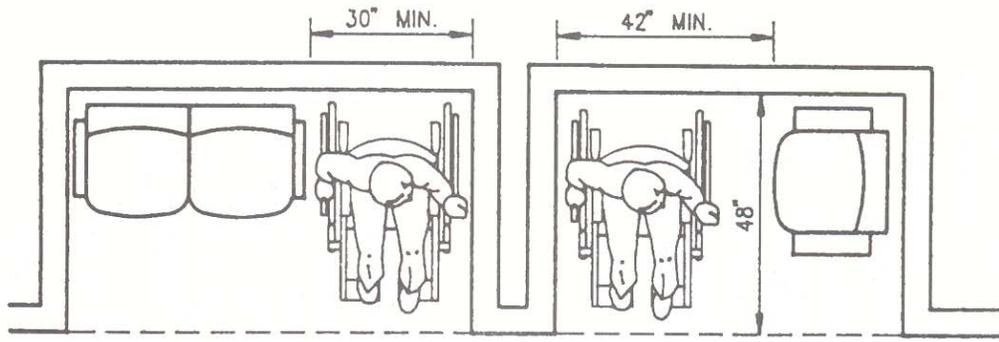






← ACCESSIBLE PATH OF TRAVEL →

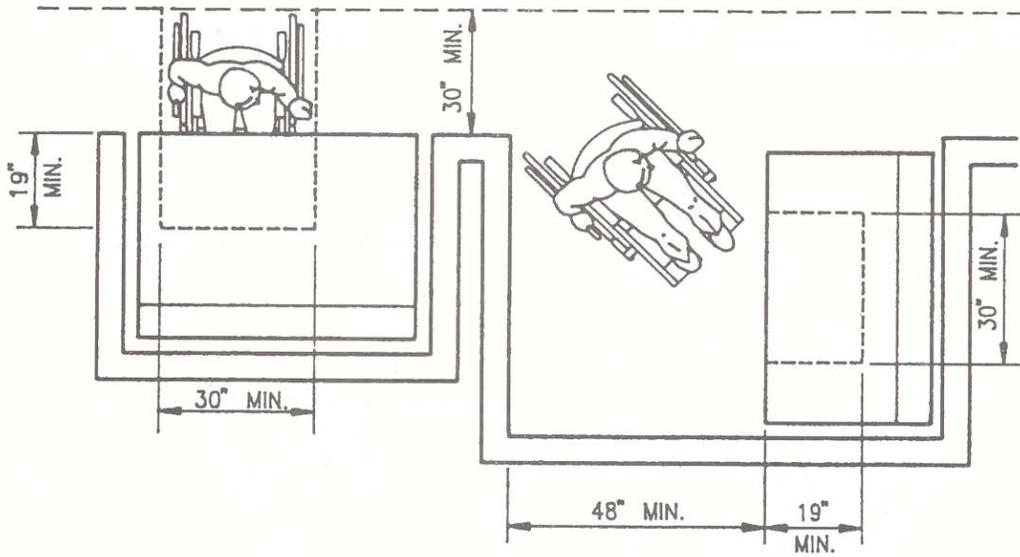


All forms and handouts are available on [www.cityofnapa.org](http://www.cityofnapa.org)

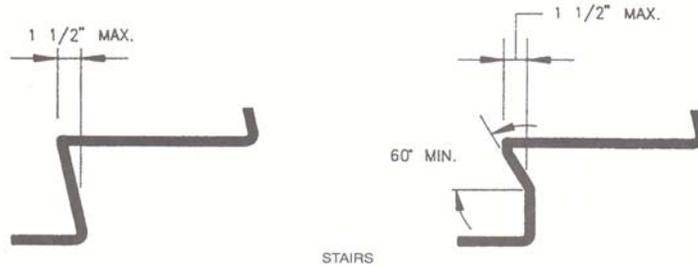


STAIRS

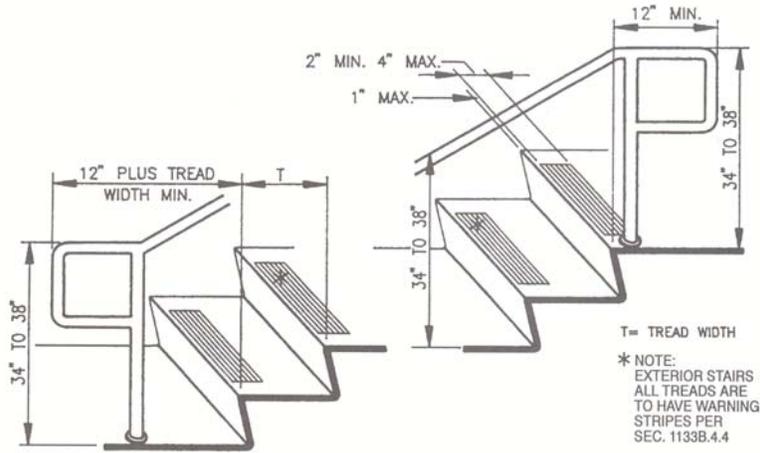

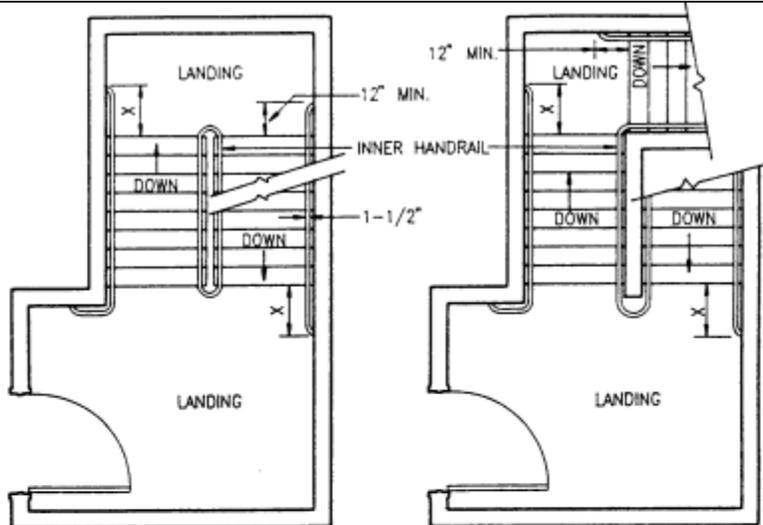

NOTE : INNER HANDRAIL AT LANDINGS OF STAIRS THAT DOUBLE BACK OR IMMEDIATELY TURN SHALL BE CONTINUOUS AND SHALL NOT EXTEND INTO LANDING OR PATH OF TRAVEL.


X : EXTENSION OF HANDRAIL SHALL BE EQUAL TO THE TREAD WIDTH PLUS 12 INCHES.

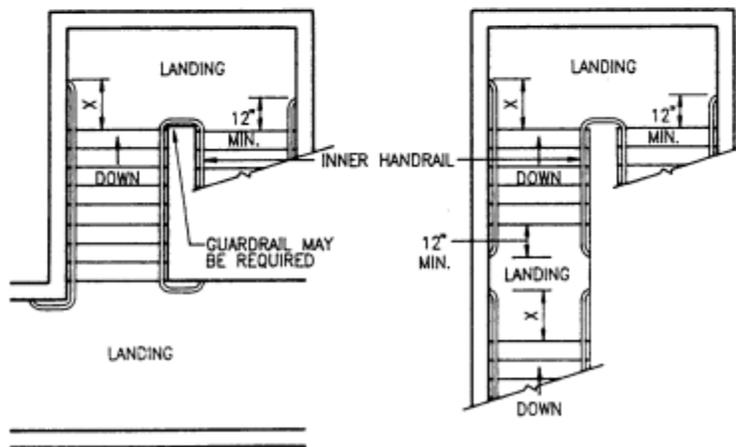


## COUNTER HIGHTS

All forms and handouts are available on [www.cityofnapa.org](http://www.cityofnapa.org)

Where a single counter contains one than one transaction station, such as (but not limited to) a bank counter with multiple teller windows or retail sales counter with multiple cash register stations, at least 5 percent (5%), but never less than one, of each type of station shall be located at a section of counter that is at least 36 inches long and no more than 28"-34" high.

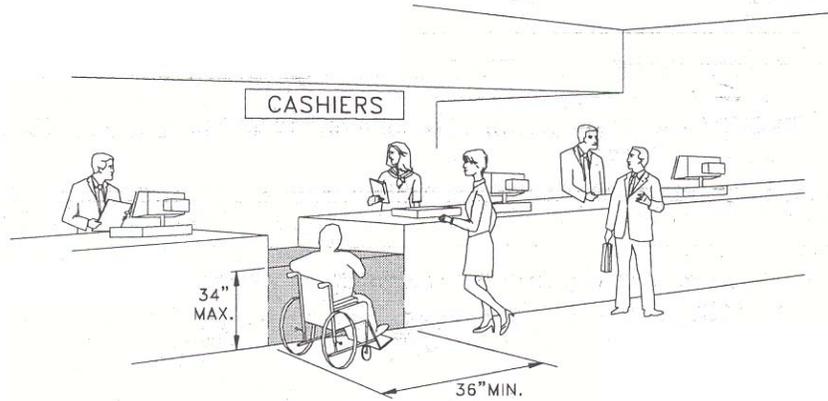

### MINIMUM CLEARANCES FOR SEATING AND TABLES

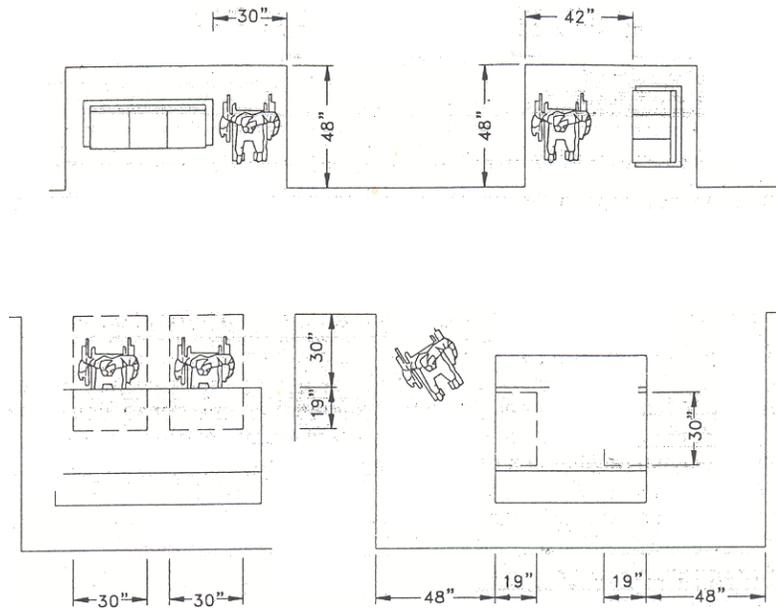

### GENERAL REQUIREMENTS FOR FIXED OR BUILT IN SEATING, TABLES & COUNTERS

All forms and handouts are available on [www.cityofnapa.org](http://www.cityofnapa.org)