


**ATS TERMINAL BOX**

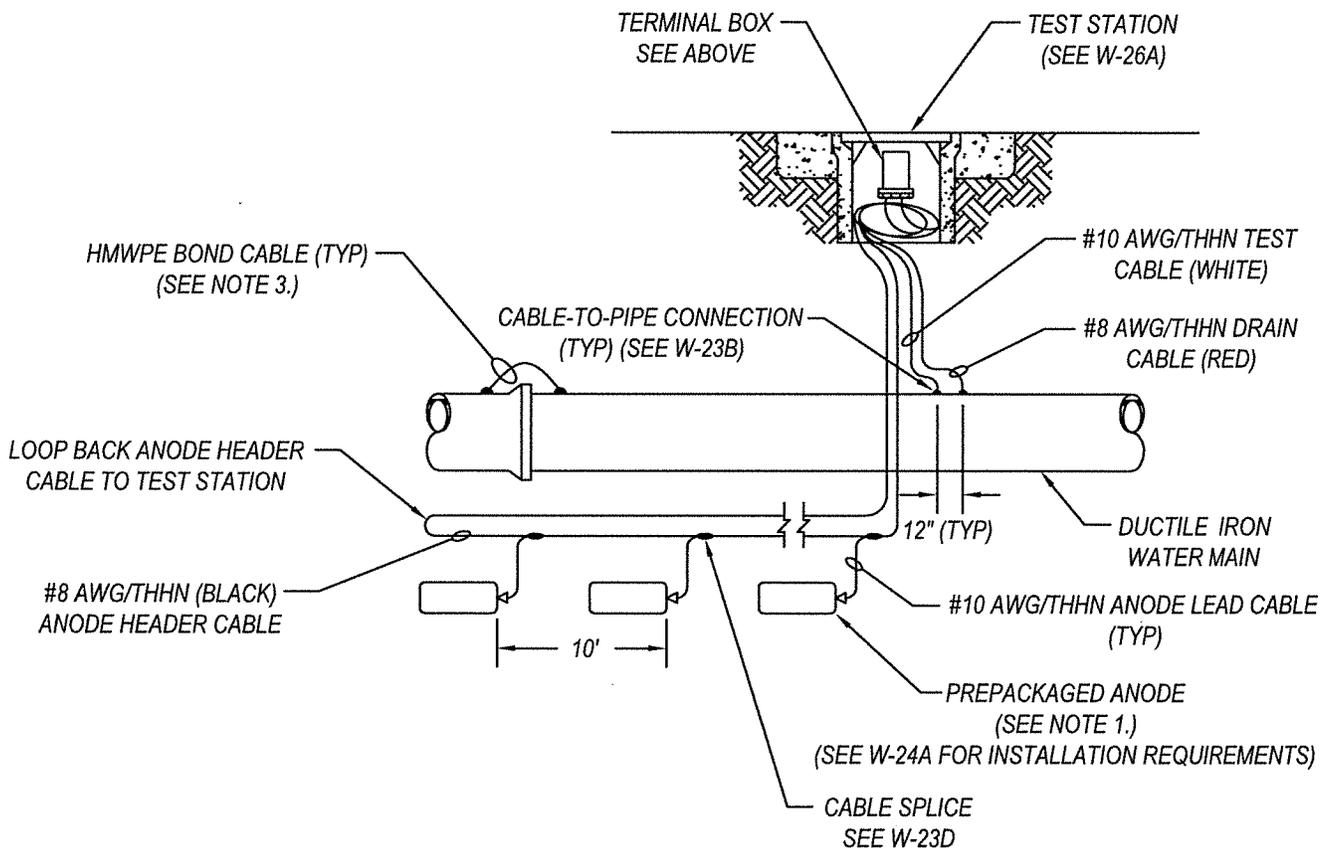

**NOTES:**

1. NUMBER AND SIZE OF ANODES SHALL BE DETERMINED BY THE PROJECT CORROSION ENGINEER.
2. THE ANODES SHALL BE INSTALLED A MINIMUM OF 3 FEET OFF THE WALL OF THE WATER PIPE.
3. BOND ALL BURIED, NON-WELDED, PIPE JOINTS PER DRAWING W-26.
4. IDENTIFY CABLES PER DRAWING W-26C.

CITY OF NAPA

PUBLIC WORKS - WATER DIVISION

**DUCTILE IRON PIPELINE - ANODE TEST STATION**

DATE REVISED DECEMBER 2015

CHECKED *[Signature]*

APPROVED *[Signature]*

SCALE NONE

DWG NO.

**W - 28A**