

Community Development Department
1600 First St., P.O. Box 660
Napa, CA 94559-0660

Engineering Division
 Phone: (707) 257-9530

Planning Division
 Phone: (707) 257-9530


Building Division
 Phone: (707) 257-9540
 Inspections: (707) 257-1063

Facsimile: (707) 257-9522

Napa Fire Department
 Fire Prevention Division
 Phone: (707) 257-9590



Interior Footing

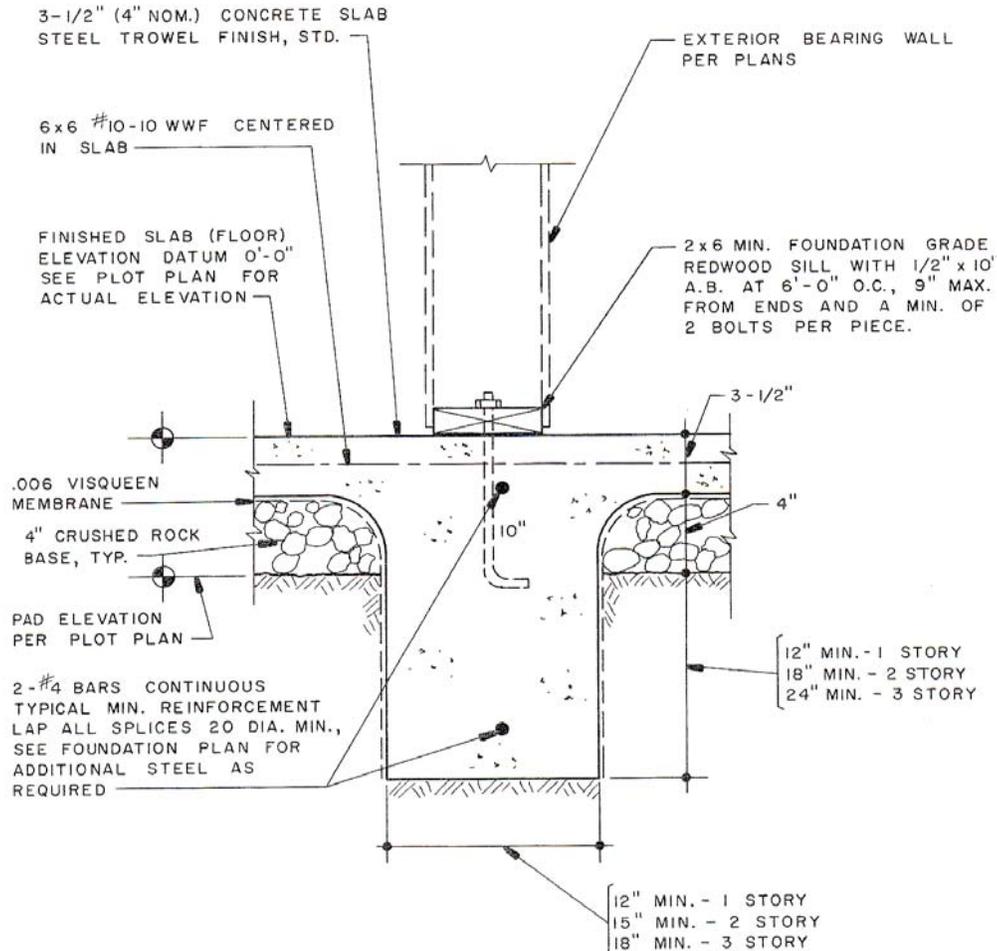



SECTION 1806A . FOOTINGS 2001 California Building Code Volume #2

1806A.1 General. Footings and foundations shall be constructed of masonry or concrete unless prior approval has been obtained from the enforcement agency and shall extend below the frost line. The horizontal dimensions of unformed concrete footings shall be increased 1 inch (25 mm) at every vertical surface at which concrete is placed directly against the soil.

All exterior footings shall extend into firm bearing in undisturbed soil or controlled compacted fill, or in expansive soil, to a depth sufficient to minimize movements in the underlying soil due to moisture changes in the soil. Footings shall have a minimum depth below finished grade as indicated in Table 18A-I-C unless another depth is recommended by a soils report. Foundation walls supporting wood shall extend above grade as required by Section 2306A.4.

All forms and handouts are available on www.cityofnapa.org

Joist Wall and Slab Foundations

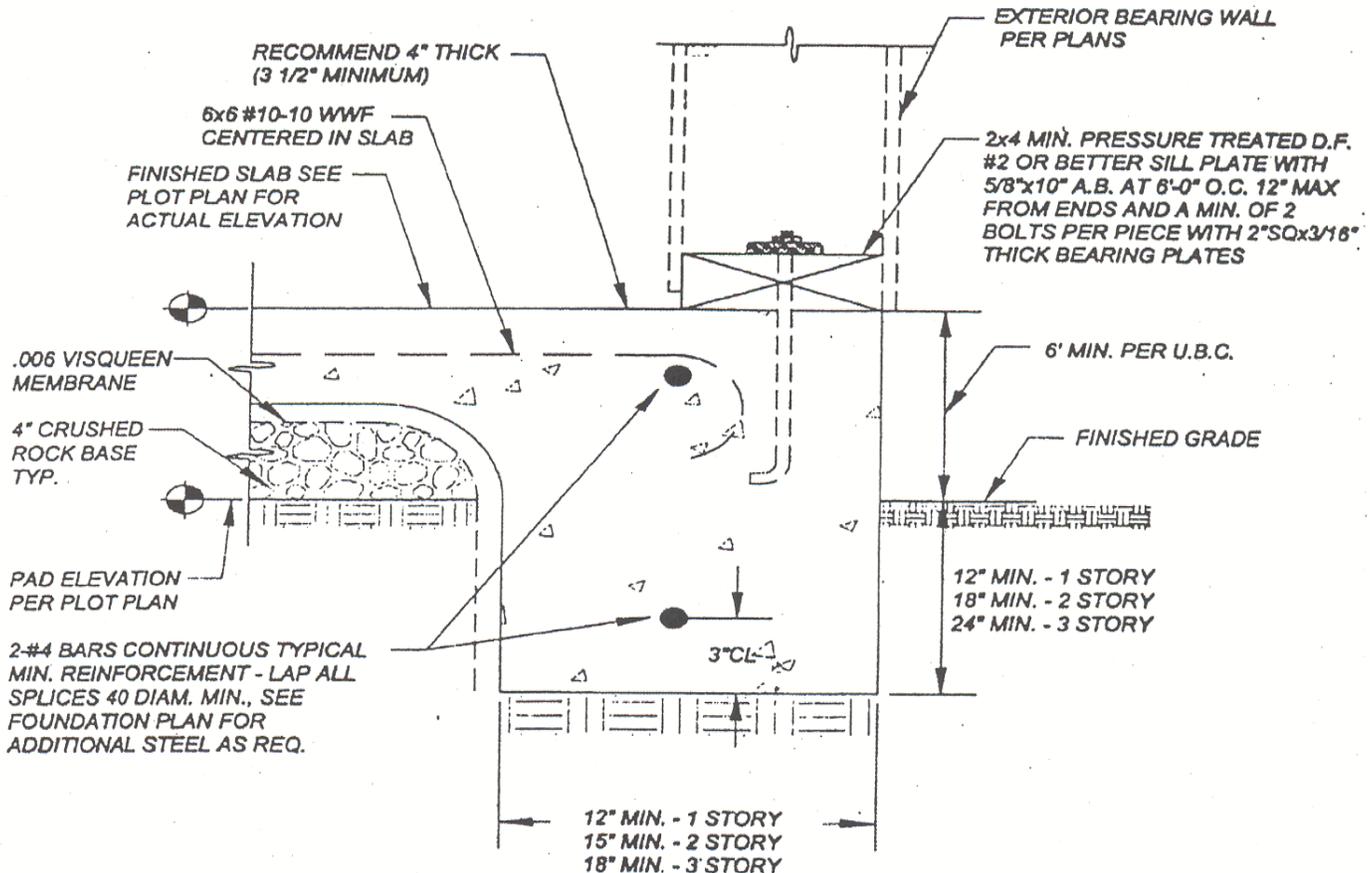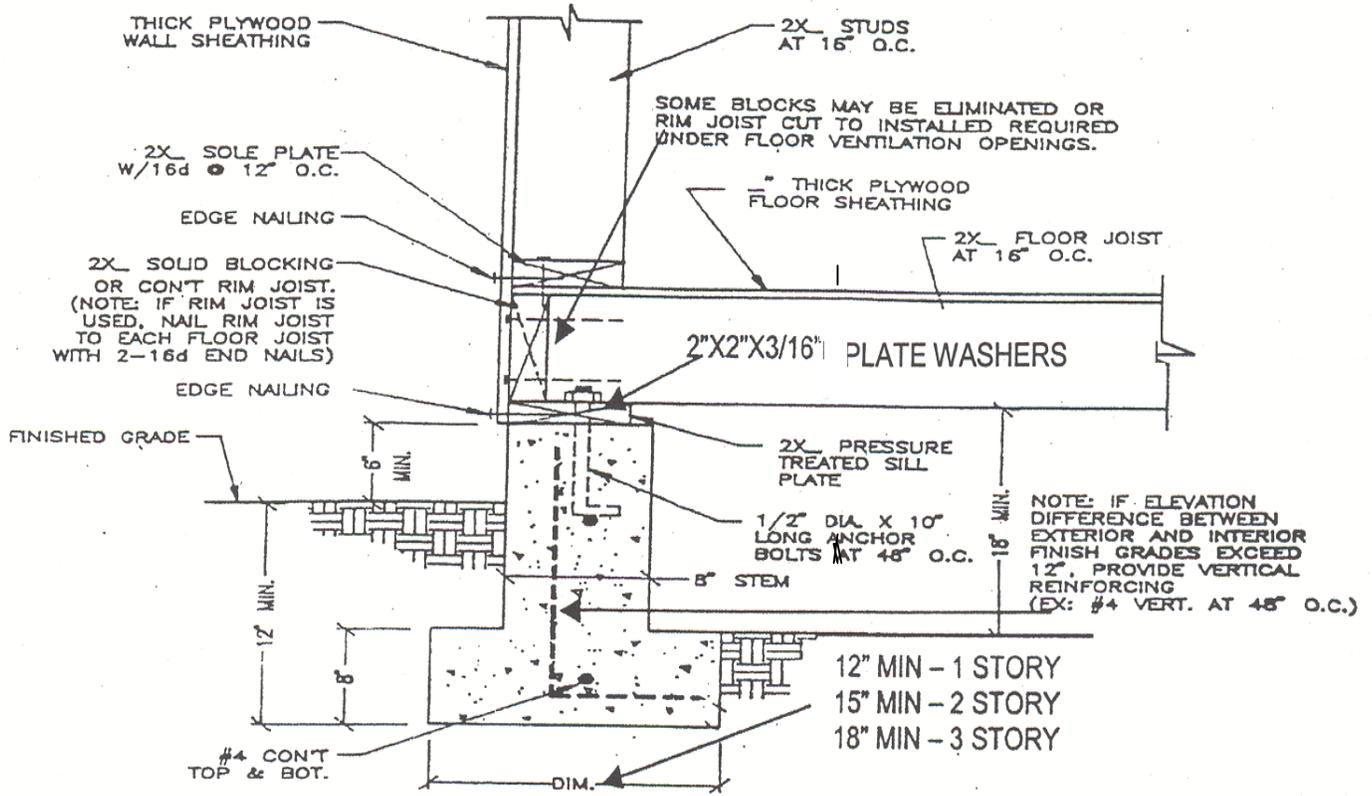

All forms and handouts are available on www.cityofnapa.org